


Vertical 200-1200W charger

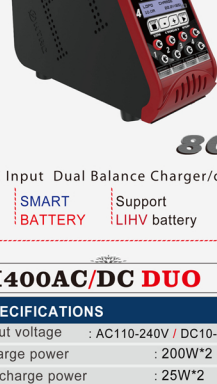

AC/DC Input Dual Balance Charger/discharger

SMART

BATTERY

Support

LIHV battery

10A*4

200W*4

H800AC/DC QUAD

SPECIFICATIONS

- Input voltage : AC110-240V / DC11-18V
- Charge power : 200W*4
- Discharge power : 25W*4
- Charge current range : 0.1-10A*4
- Discharge current range : 0.1-5A*4
- Current drain for balancing: 500mA/cell
- Lilon/LiPo/LiFe cell count : 1-6cells*4
- NiCd/NiMH cell count : 1-15cells*4
- Pb battery voltage : 2-20V*4
- Smart battery : I/II/III
- Battery data memory : 20profiles
- Size : 264x93x249mm
- Weight : 3.65kg

H400AC/DC DUO

SPECIFICATIONS

- Input voltage : AC110-240V / DC10-18V
- Charge power : 200W*2
- Discharge power : 25W*2
- Charge current range : 0.1-10A*2
- Discharge current range : 0.1-5A*2
- Current drain for balancing: 500mA/cell
- Lilon/LiPo/LiFe cell count : 1-6cells*2
- NiCd/NiMH cell count : 1-15cells*2
- Pb battery voltage : 2-20V*2
- Smart battery : I/II/III
- Battery data memory : 20profiles
- Size : 264x93x249mm
- Weight : 2.55kg



AC/DC Input Dual Balance Charger/discharger

SMART

BATTERY

Support

LIHV battery

10A*2


200W*2

HT400AC/DC

Dual Balance Charger/discharger

SPECIFICATIONS

- Input voltage : AC110-240V / DC10-30V
- Charge power : 400W
- Discharge power : 25W
- Charge current range : 0.1-20A
- Discharge current range : 0.1-5A
- Current drain for balancing: 500mA/cell
- Lilon/LiPo/LiFe cell count : 1-6cells
- NiCd/NiMH cell count : 1-20cells
- Pb battery voltage : 2-24V
- Size : 190x93x249mm
- Weight : 2.3kg



4.3"

Touch Screen

20A

400W

SMART BATTERY

Support
LIHV battery


H200AC/DC

AC/DC Input Dual Balance Charger/discharger

SMART

BATTERY

Support

LIHV battery

10A

200W

SPECIFICATIONS

- Input voltage : AC110-240V / DC10-30V
- Charge power : 400W
- Discharge power : 25W
- Charge current range : 0.1-20A
- Discharge current range : 0.1-5A
- Current drain for balancing: 500mA/cell
- Lilon/LiPo/LiFe cell count : 1-6cells
- NiCd/NiMH cell count : 1-20cells
- Pb battery voltage : 2-24V
- Size : 190x93x249mm
- Weight : 2.3kg


20A
400W

SMART BATTERY

Support
LIHV battery

H400AC/DC



4.3"

Touch Screen

HT 700AC/DC DUO

SPECIFICATIONS

- Input voltage : AC110-240V / DC10-30V
- Charge power : 350W*2
- Discharge power : 25W*2
- Charge current range : 0.1-20A*2
- Discharge current range : 0.1-5A*2
- Current drain for balancing: 500mA/cell
- Lilon/LiPo/LiFe cell count : 1-8cells
- NiCd/NiMH cell count : 1-15cells*2
- Pb battery voltage : 2-24V*2
- Size : 264x93x249mm
- Weight : 3.8kg

Lilon/LiPo/LiFe
1-8S

Support
LIHV battery

SMART BATTERY
I/II/III


Double independent output

20A*2
350W*2

AC/DC Input Dual Balance Charger/discharger



HT1200AC/DC



4.3"

Touch Screen

40A

1200W

Input voltage : AC110-240V / DC10-30V | Charge power : 1200W | Discharge power: 120W
Charge current range : 0.1-40A | Discharge current range: 0.1-5A | Current drain for balancing : 1000mA/cell

Lilon/LiPo/LiFe cell count: 1-8cells | NiCd/NiMH cell count : 1-20cells

Smart battery : I/II/III | Pb battery voltage : 2-24V | Battery data memory : 10profiles

Size: 344x93x249mm | Weight: 4.3kg




Flat 200-1200W charger

SPECIFICATIONS

- Input voltage : AC110-240V / DC10-30V
- Charge power : 200W*2
- Discharge power : 25W*2
- Charge current range : 0.1-20A*2
- Discharge current range : 0.1-5A*2
- Current drain for balancing: 500mA/cell
- Lilon/LiPo/LiFe/LiHV cell count : 1-6cells*2
- NiCd/NiMH cell count : 1-15cells*2
- Pb battery voltage : 2-20V*2
- Size : 190x93x249mm
- Weight : 1.088kg

HT206AC/DC DUO

AC/DC Input Dual Balance Charger/discharger



4.3"

Touch Screen

SMART

BATTERY

Support


LIHV battery

SPECIFICATIONS

- Input voltage : DC10-30V
- Charge power : 600W*2
- Discharge power : 25W*2
- Charge current range : 0.1-30A*2
- Discharge current range : 0.1-5A*2
- Current drain for balancing: 500mA/cell
- Lilon/LiPo/LiFe cell count : 1-6cells*2
- NiCd/NiMH cell count : 1-15cells*2
- Pb battery voltage : 2-20V*2
- Size : 280x143x73mm
- Weight : 1.072kg

HT306 DC DUO

DC Input Balance Charger/discharger



4.3"

Touch Screen

SMART

BATTERY

Support

LIHV battery

30A*2

600W*2

SPECIFICATIONS

- Input voltage : AC110-240V / DC10-30V
- Charge power : 300W
- Discharge power : 25W
- Charge current range : 0.1-20A
- Discharge current range : 0.1-5A
- Current drain for balancing: 500mA/cell
- Lilon/LiPo/LiFe cell count : 1-8cells
- NiCd/NiMH cell count : 1-20cells
- Pb battery voltage : 2-24V
- Smart battery : I/II/III
- Battery data memory : 8profiles
- Size : 162x143x73mm
- Weight : 1.008kg

4.3"

Touch Screen



300W

AC/DC Input Dual Balance Charger/discharger

SMART

BATTERY

Support

LIHV battery

20A

300W

100W charger

H100AC/DC

AC/DC Input Dual Balance Charger/discharger

Input voltage : AC110-240V / DC11-18V | Charge power : 100W | Discharge power: 10W
Charge current range : 0.1-10A | Discharge current range: 0.1-2A | Current drain for balancing : 400mA/cell

Lilon/LiPo/LiFe cell count: 1-6cells | NiCd/NiMH cell count : 1-15cells

Pb battery voltage : 2-20V | Battery data memory : 20profiles

Size: 122x139x53mm | Weight : 295g

HT100AC/DC

AC/DC Input Dual Balance Charger/discharger

10A

100W



3.2"

Touch Screen


- Input voltage : AC110-240V / DC11-18V
- Charge power : 100W
- Discharge power : 10W
- Charge current range : 0.1-10A
- Discharge current range : 0.1-2A
- Current drain for balancing: 350mA/cell
- Lilon/LiPo/LiFe cell count : 1-6cells
- NiCd/NiMH cell count : 1-15cells
- Pb battery voltage : 2-20V
- Smart battery : I/II/III
- Battery data memory : 8profiles
- Size : 122x129x53mm
- Weight : 300g

HT106AC/DC

AC/DC Input Dual Balance Charger/discharger

10A

100W

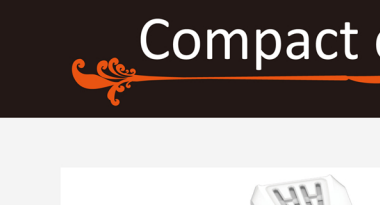

3.2"

Touch Screen

- Input voltage : AC110-240V / DC11-18V
- Charge power : 100W
- Discharge power : 10W
- Charge current range : 0.1-10A
- Discharge current range : 0.1-2A
- Current drain for balancing: 350mA/cell
- Lilon/LiPo/LiFe cell count : 1-6cells
- NiCd/NiMH cell count : 1-15cells
- Pb battery voltage : 2-20V
- Smart battery : I/II/III
- Battery data memory : 8profiles
- Size : 122x129x53mm
- Weight : 300g

Compact charger



H4 AC Compact charger

Lilon

2-4cells

LiPo

2-4cells

LiFe

2-4cells

Charge power

20W

Size: 35*60*97mm



H6 AC/DC Compact charger

LiPo/LiFe

2-6S

NiCd/NiMH

1-15S

Charge current range: 0.1-5A | Charge power: 50W | Input voltage: AC110-240V / DC11-18V

HT6 AC/DC Compact charger

1.8"

Touch Screen



SPECIFICATIONS

- Input voltage : AC110-240V / DC11-18V
- Charge power : 50W
- Charge current range : 0.1-5A
- Discharge current range : 0.1-2A
- Current drain for balancing: 350mA/cell
- Lilon/LiPo/LiFe cell count : 1-6cells
- NiCd/NiMH cell count : 1-15cells
- Pb battery voltage : 2-20V
- Size : 122x129x53mm
- Weight : 300g